




Fig.2.

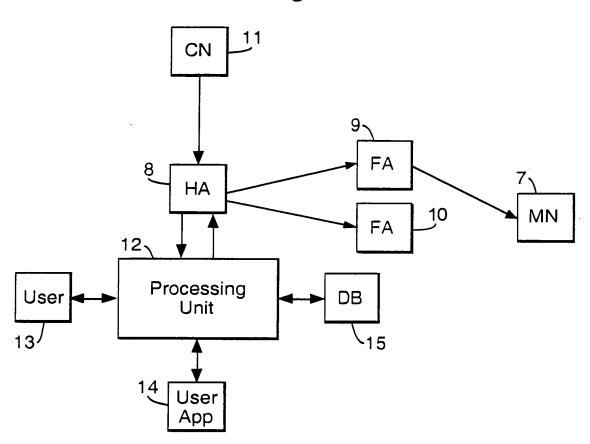

	·								
TIG.3.	/20	Network		GSM GPRS	GSM Transparent	GSM Non- Transparent	Wired LAN	Wireless LAN	
	61)	User-Defined	Security Risk	Low	Low	Low	Low	High	
			Date Type	Voice	N/A	Text	N/A	N/A	
	718	ters 718c	Bit Error Rate (Max)	10e-5	10e-3	10e-5	10e-9	10e-4	
		Quality Parameters 18a18b	Access Delay (ms)	120	120	Variable	N/A	50	
		Quali 18a	Data Rate (kbit/s)	20	9.6	9.6	10000	2000	
	(1)	IP Address		192.0.1.255	192.6.2.255	192.6.0.1	192.6.3.8	192.6.5.1	
	16		<u></u>	<u></u> .	1	l			

MAR 0 7 2005

